

SOPORTE TANQUES CON ANTIVUELCO PARA MOD. 350 MOUNTING-KIT LIFT-OFF PREVENTION FOR MOD. 350

Material:

Acero cincado

Acc. 35902-35903


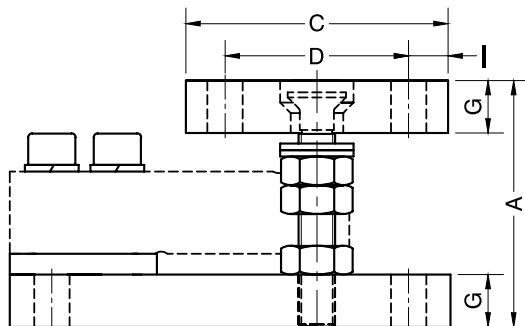
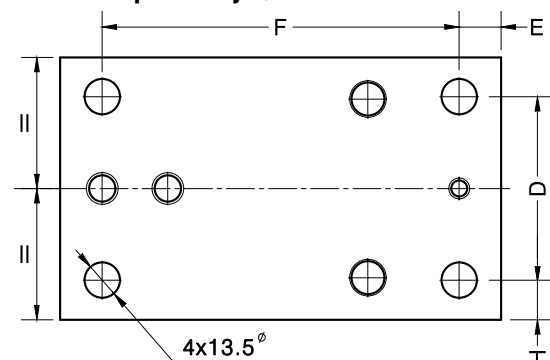
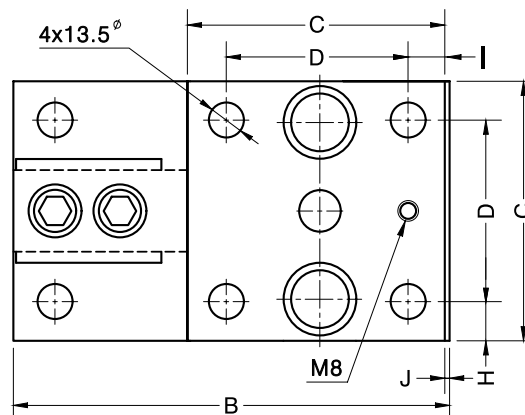
Acero inoxidable

Acc. 35902i-35903i
Material:

Alloy Steel zinc-plated

Acc. 35902-35903

Stainless Steel

Acc. 35902i-35903i

Vista por abajo / View from below


Accesorio Accessory	Carga nominal Nominal load	A	B	C	D	E	F	G	H	I	J	Peso transporte Transport weight
35902	0.3...2 t	94	168	100	70	16	136	20	15	15	1	5 kg
35903	3...5 t	113	212	120	84	18	175	25	18	18	-	8.5 kg

	Acero cincado / Alloy Steel zinc-plated		Acero inoxidable / Stainless Steel	
	35902	35903	35902i	35903i
Máximo desplazamiento horizontal <i>Maximum horizontal offset</i>	±2.5 mm	±2 mm	±2.5 mm	±2 mm
Máxima fuerza de levantamiento <i>Maximum lift-off force</i>	69 kN	113.04 kN	69 kN	113.04 kN
Máxima fuerza horizontal <i>Maximum horizontal force</i>	7.93 kN	11.8 kN	5 kN	11.8 kN

 Dimensiones en mm. *Dimensions in mm.*